

VE.650- 6.5 Mt



ROAD
BARRIERS



- Electromechanical road barrier for passages up to 6,5 m, intensive use with great performances
- Safety guaranteed by low voltage
- Easy installation and programming of the barrier
- Stainless steel version available
- Possibility of integrated photocells thanks to the innovative hide-away system that enables them to be perfectly integrated with the look, ensuring maximum functionality

**Equipped with
foundation plate**


**The standard road barriers
are equipped with 2
neutral springs**





VE.650




Sturdy and compact
operator for maximum
reliability and long life

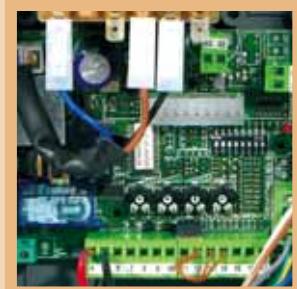

Built-in control panel with fast
and easy programming

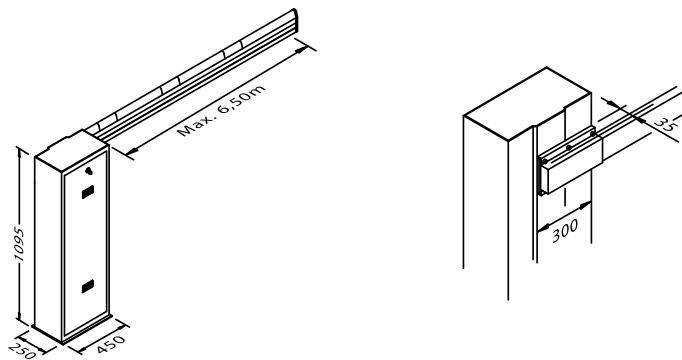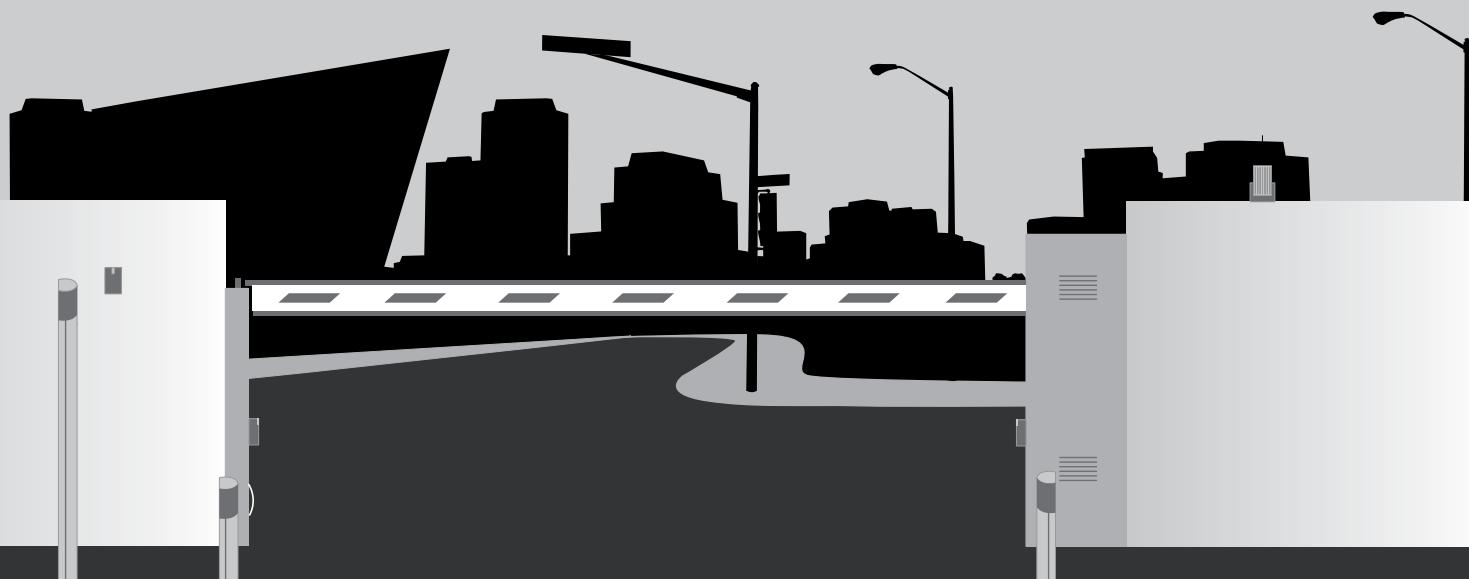

VE.P650

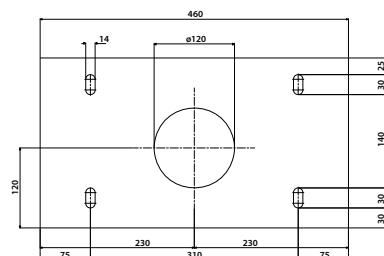

HOW TO CHOOSE THE TYPE OF SPRING AND THE POSSIBLE ACCESSORIES

CODE	TYPE OF SPRING	LENGTH OF ROAD BARRIER BEAM (m)	THE POSSIBLE ACCESSORIES
VE.650/I	1 neutral	4,5	VE.AM - SC.RES - VE.L650 - VE.RAST - VE.RP
	1 yellow + 1 neutral	5	VE.AM - SC.RES - VE.L650 - VE.RAST - VE.RP
	1 yellow + 1 neutral	5,5	VE.AM - SC.RES - VE.L650 - VE.RAST - VE.RP
	1 yellow + 1 neutral	6	-
	2 neutral	6	VE.AM - SC.RES - VE.L650 - VE.RAST - VE.RP
	2 neutral	6,5	VE.AM - SC.RES - VE.L650 - VE.RAST - VE.RP

TECHNICAL DATA

VE.650

VE.650I

Power supply	230 Vac	230 Vac
Motor supply	24 Vdc	24 Vdc
Max. Absorbed current	1,6 A	1,6 A
Torque	285 Nm	285 Nm
Opening speed	5"-7"	5"-7"
Operation cycle	intensive use	intensive use
Protection level	IP 44	IP 44
Operating Temp.	-20°C/+50°C	-20°C/+50°C
Weight	83,6 Kg	83,6 Kg
Items no. per pallet	6	6