

Central Mount Rolling Shutter Motor Made in Italy


HIGH SPECIALISATION

All models in the Prestige range are designed and built to offer the highest performances and to satisfy the various demands as regards automation.



TECHNICAL DATA

* 42/48 possible shaft diameters with KR60.42 / KR60.48 accessories.

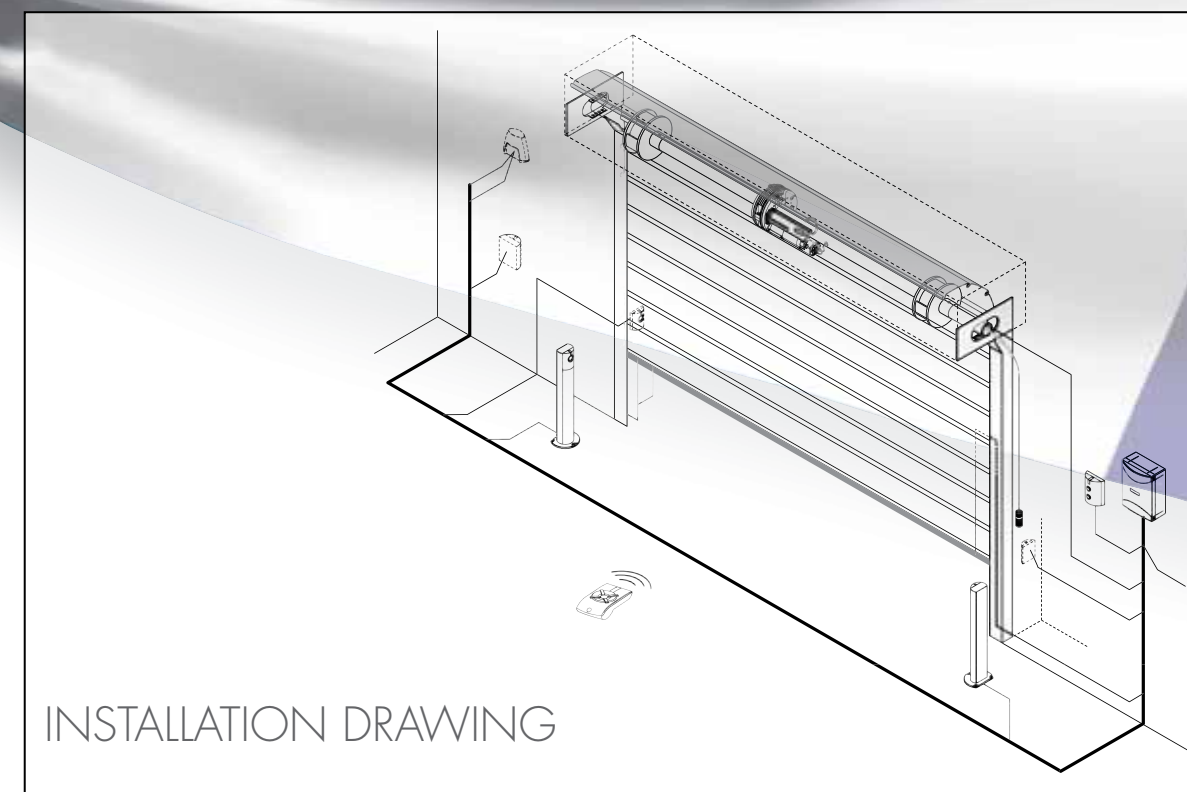


INSTALLATION DRAWING

Modello / Model / Modèle	PS1.60	PS1.60E	PS1.60EC
Alimentazione di rete / Power supply / Alimentation de réseau	230 Vac (50-60Hz)	230 Vac (50-60Hz)	230 Vac (50-60Hz)
Alimentazione motore / Motor supply / Alimentation moteur	230 Vac	230 Vac	230 Vac
Corrente massima assorbita / Max. absorbed current / Courant max. absorbée	2,83 A	2,93 A	2,93 A
Peso max. serranda bilanciata / Max balanced rolling shutter weight / Max. Poids du rideaux équilibrés	150 kg	150 kg	150 kg
Coppia massima / Max. Torque / Couple max.	150 Nm	150 Nm	150 Nm
Velocità di apertura a vuoto / Opening speed / Vitesse d'ouverture à vide	10 r.p.m	10 r.p.m	10 r.p.m
Superficie massima serranda / Max rolling shutter size / Surface maximum du rideau	20 mq	20 mq	20 mq
Corsa massima serranda / Max rolling shutter stroke / Course maximum du rideau	7 m	7 m	7 m
Diametro asse serranda mm / Shaft diameter / Diamètre axe rideau	(42/48)* 60 mm	(42/48)* 60 mm	(42/48)* 60 mm
Diametro puleggia / Pulley diameter / Diamètre axe poulie	200 / 220 mm	200 / 220 mm	200 / 220 mm
Indice di protezione / Protection level / Degré de protection	IP XO	IP XO	IP XO
Temperatura di funzionamento / Operating temp. / Temp. Fonctionnement	-20° C / +50° C	-20° C / +50° C	-20° C / +50° C
Classe isolamento / Insulation class / Classe d'isolement	F	F	F
Lubrificazione / Lubrication / Lubrification	GRASSO / GREASE / GRAS		
Elettrofreno / Electrobake / Électro-frein	No / No / Non	Si / Yes / Oui	Si / Yes / Oui
Cavo 4mt / Cable 4m / Câble 4m	No / No / Non	No / No / Non	Si / Yes / Oui
Finecorsa / Limit switch / Fin de course	Manuale / Manual / Manuel		
Peso / Weight / Poids	5,4 kg	6,3 kg	6,3 kg

QUALITY AUTOMATIONS

Add : #351 &352, Kempegowda Layout, Outer Ring Road, Laggere, Bangalore - 560058. INDIA _ Tel. +91 080 28397671 / + 91 9591975597 / +91 9686077009

Email - info@qualityautomations.com , Website : www.qualityautomations.com

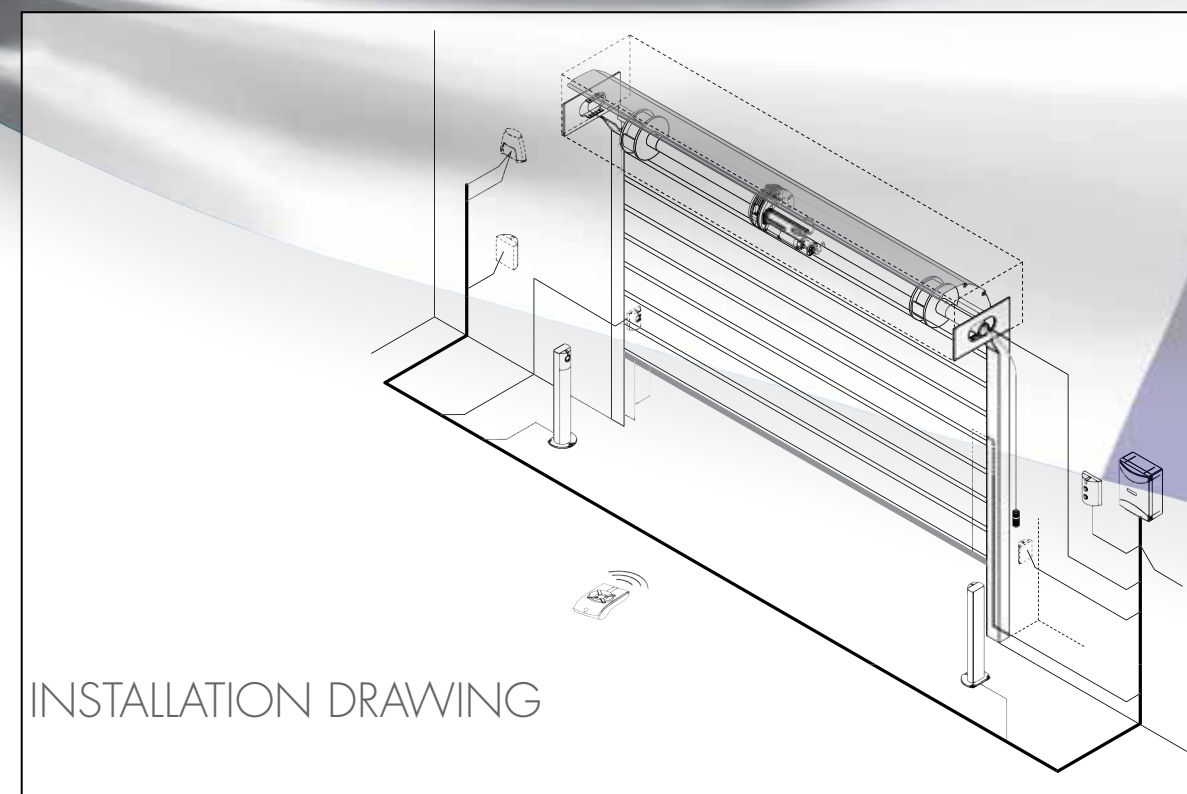

INSTALLATION DRAWING

TECHNICAL DATA

Modello / Model / Modèle	PS2.76A	PS2.76AE	PS2.76AEC
Alimentazione di rete / Power supply / Alimentation de réseau	230 Vac (50-60Hz)	230 Vac (50-60Hz)	230 Vac (50-60Hz)
Alimentazione motore / Motor supply / Alimentation moteur	230 Vac	230 Vac	230 Vac
Corrente massima assorbita / Max. absorbed current / Courant max. absorbée	4,72 A	4,82 A	4,82 A
Peso max. serranda bilanciata / Max balanced rolling shutter weight / Max. Poids du rideaux équilibrés	280 kg	280 kg	280 kg
Coppia massima / Max. Torque / Couple max.	330 Nm	330 Nm	330 Nm
Velocità di apertura a vuoto / Opening speed / Vitesse d'ouverture à vide	8,4 r.p.m	8,4 r.p.m	8,4 r.p.m
Superficie massima serranda / Max rolling shutter size / Surface maximum du rideau	30 mq	30 mq	30 mq
Corsa massima serranda / Max rolling shutter stroke / Course maximum du rideau	7 m	7 m	7 m
Diametro asse serranda mm / Shaft diameter / Diamètre axe rideau	76 mm	76 mm	76 mm
Diametro puleggia / Pulley diameter / Diamètre axe poulie	240 mm	240 mm	240 mm
Indice di protezione / Protection level / Degré de protection	IP XO	IP XO	IP XO
Temperatura di funzionamento / Operating temp. / Temp. Fonctionnement	-20° C / +50° C	-20° C / +50° C	-20° C / +50° C
Classe isolamento / Insulation class / Classe d'isolement	F	F	F
Lubrificazione / Lubrication / Lubrification	GRASSO / GREASE / GRAS		
Elettrofreno / Electrobrake / Électro-frein	No / No / Non	Si / Yes / Oui	Si / Yes / Oui
Cavo 4mt / Cable 4m / Câble 4m	No / No / Non	No / No / Non	Si / Yes / Oui
Finecorsa / Limit switch / Fin de course	Manuale / Manual / Manuel		
Peso / Weight / Poids	9,7 kg	10,6 kg	10,6 kg

QUALITY AUTOMATIONS

Add : #351 &352, Kempegowda Layout, Outer Ring Road, Laggere, Bangalore - 560058. INDIA _ Tel. +91 080 28397671 / + 91 9591975597 / +91 9686077009

Email - info@qualityautomations.com , Website : www.qualityautomations.com